




HMI

TS·TG·MTG·CCSG·RT·OP

HMI model distribution

The Xinje HMI mainly includes two major series, TS and TG. The TS series is a new generation of HMI, which based on Linux system and equipped with an efficient A7 dual core processor, make touch screen operations more efficient and fast, which is beneficial for users to process data on the touch screen. Simultaneously retaining the original features of high protection and low failure rate, it has a wider range of applications. Current TS series include 4.3 inches, 7 inches, 10 inches, and 15.6 inches.

The TG series general models cover sizes from 4.3 inches to 15.6 inches, with 8 sub-series that maintain consistent high protection and low failure rates. They are suitable for various occasions, as well as in trusses, robots, logistics and other industry projects.

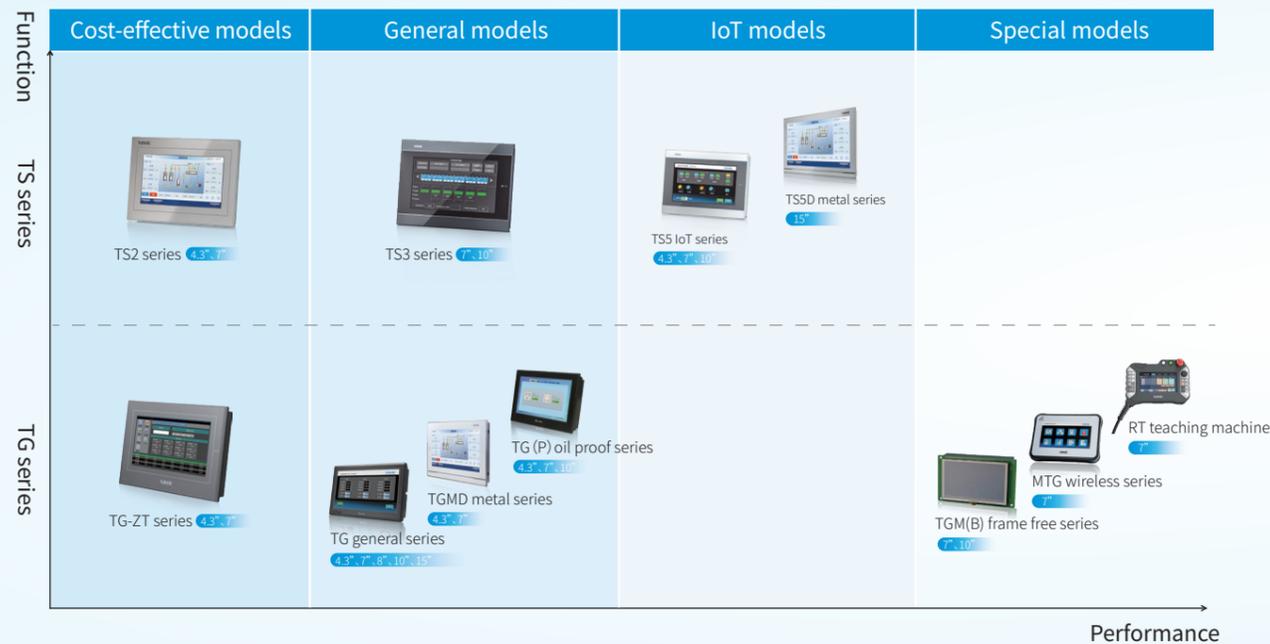

TS series high performance HMI

Adopting Linux system and equipped with efficient dual core A7 processor, the human-machine experience is smoother



TS5D series - Metal IoT HMI

- Market with high structural requirements for IoT demand



TS5 series - IoT HMI

- Targeting the IoT market



TS3 series - Standard HMI

- Targeting the general automation market



TS2 series - Entry-level HMI

- Targeting the small single machine and electrical market



High performance processors

Adopting ARM Cortex-A7 dual core processor, 1GHz main frequency, built-in 128MB memory, expandable USB storage.

Efficient system

Based on the Linux system, the multitasking mechanism significantly improves system response speed, making operations more efficient and efficient.

Multi-directional installation at will

Support free installation in four directions, meeting the needs of different occasions.



Rich device connectivity



IoT type metal HMI

TS5D series 15.6"

- Adopting Cortex-A7 dual core processor, with a main frequency of 1.2GHz
- Covering mainstream information exchange protocols, supporting MQTT and TCP/IP
- The metal structure of the entire machine enhances anti-interference and heat dissipation
- Support streaming media and video playback, with better performance when used in conjunction with audio
- Support network cameras for remote monitoring
- Relying on TouchWinPro software, it is easy to use and run efficiently




Product specification

Item	TS5D-1500-E2	TS5D-1500-4G	TS5D-1500-W	
Product feature	Size	15.6"		
	Type	16.77 million colors		
	Resolution	1920*1080		
	Brightness	250 cd/m ²		
	Touch panel	Four-wire resistive touch panel		
	Service life	Over 30000 hours, ambient temperature of 25°C, 24-hour operation		
	Processor	Cortex-A7 1.2GHz		
	Storage	256MB		
Interface	Adaptive software	TouchwinPro software		
	COM1	RS232/RS485		
	COM2	RS232/RS485/RS422		
	Ethernet port	Standard RJ45, 10/100M*2		
	USB port1	USB-A (compliant with USB2.0 specifications), 2 USB flash drive ports		
	USB port2	Type-C, USB download port		
	Audio	Ø3.5coaxial audio interface		
	4G	/	4G LTE-FDD (Mbps): 10 (downlink) / 5 (uplink)	/
	WiFi	/	/	IEEE 802.11 a/b/g/n IEEE 802.11 g: 54Mbps
	Electrical feature	Input voltage	DC24V (voltage range: DC22V-DC26V)	
Power		10W		
Allowable instant power failure		Below 10ms (actual power loss less than 1s)		
Withstand voltage		AC1000V, 10mA, less than 1 minute (signal to ground)		
Environment	Insulation impedance	DC500V, above 10MΩ (signal to ground)		
	Operation temperature	0-50°C		
	Storage temperature	-10-60°C		
	Environmental humidity	10%RH-90%RH (without condensation)		
	Vibration resistance	10-25Hz (2G in X, Y, and Z directions for 30 minutes each)		
	Anti-interference	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute		
	Surrounding air	Non corrosive gas		
Structure	Protection level	Front panel Ip65		
	Cooling method	Natural air cooling		
	External dimension (mm)	396.0*259.0*39.0		
Opening size (mm)	384.0*247.0 (±0.5)			

Dimension (unit: mm)

TS5D-1500 series

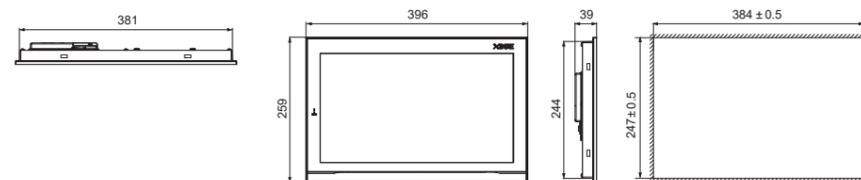

IoT type HMI

TS5 series 10.1" 7" 4.3"

- Remote functions: remote desktop (remote control of HMI real-time screen on PC), remote transparent transmission (remote upload/download PLC program), remote download (updating HMI program)
- Support audio output and can output various types of audio through external speakers
- Covering mainstream information exchange protocols and supporting MQTT/TCP IP
- Standard network port, networking through optional WIFI/4G module
- Edge computing, conducive to data analysis and statistics




Product specification


Product model		TS5-700-E TS5-700-4G TS5-700-W	TS5-1000-E TS5-1000-4G TS5-1000-W
Product features	Size	7"	10.1"
	Type	16.77 million colors	
	Resolution	800*480	1024*600
	Brightness	200 cd/m ²	
	Touch panel	Four-wire resistive touch panel	
	Service life	Above 50000 hours, ambient temperature 25°C, 24 hours operation	
	Processor	Cortex-A7 1GHz	
Interface	Memory	128MB	
	COM1 port	RS232/RS485	
	COM2 port	RS232/RS485/RS422	
	Ethernet port	Standard RJ45, 10/100M	
	USB-A port	Flash disk port, USB2.0 standard	
	Audio	ø3.5Coaxial audio plug	
	4G (only supported by 4G models)	4G LTE-FDD (Mbps): 10 (downlink)/5 (uplink)	
Electrical features	WiFi (only supported by W models)	IEEE 802.11 a/b/g/n IEEE 802.11g: 54Mbps	
	Input voltage	DC24V (voltage range: DC22-DC26V)	
	Power	5W	8W
	Allowable instantaneous power failure	Below 10ms (actual power loss less than 1s)	
	Withstand voltage	AC1000V, 10mA, less than 1 minute (signal and ground)	
	Insulation impedance	Above DC500V, 10MΩ (signal and ground)	
	Operation temperature	0-50°C	
Environment	Storage temperature	-20-60°C	
	Ambient humidity	10%RH-90%RH (no condensation)	
	Vibration resistance	10-25Hz (X, Y, Z direction each 30 minutes 2G)	
	Anti-interference	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute	
	Ambient air	No corrosive gas	
	Protection level	Front panel IP65	
	Cooling method	Natural air cooling	
Structure	External dimension (mm)	205.8*147.2*35.5	277.0*191.7*37.6
	Opening size (mm)	192.1*138.5(±0.1)	260.2*179.7(±0.1)

Dimension (unit: mm)

TS5-700-E/4G/W

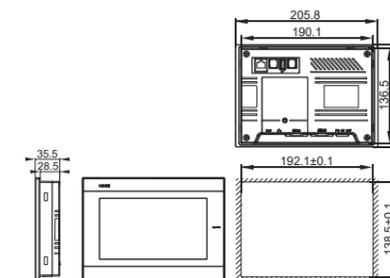

TS5-1000-E/4G/W

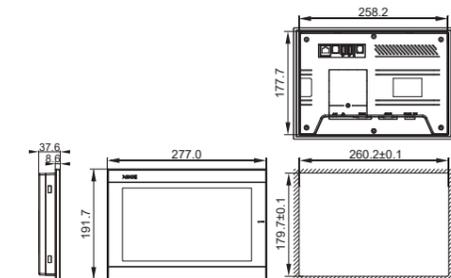

Standard type HMI

TS3 series

10.1" 7"

- Adopting Cortex-A7 dual core processor, with a main frequency of 1GHz and built-in 128MB memory
- Rich in functions, suitable for various occasions
- Stronger sealing performance, providing better protection against dust, water vapor, and debris
- The product structure conforms to lightweight design, making it lighter and thinner
- New TouchWinPro software with comprehensive feature upgrades




Product specification


Product models	TS3-700-M	TS3-700-M3	TS3-700-E	TS3-700-Z	TS3-1000-M	TS3-1000-E	TS3-1000-Z	
Product feature	Size	7.0"				10.1"		
	Resolution	800*480				1024*600		
	LCD	TFT LCD display with LED backlight						
	Display color	16.77 million colors						
	Brightness	200 cd/m ²						
	Touch panel	Four-wire resistive touch panel						
	Service life	Above 50000 hours, ambient temperature 25°C, 24 hours operation						
Interface	Processor	Cortex-A7 1GHz						
	Memory	128MB						
	COM1	RS232/RS485		RS232	RS232/RS485			RS232
	COM2	RS232/RS485/RS422			RS485	RS232/RS485/RS422		RS485
	COM3	/	RS485	/	/	/	/	
	USB-A	Flash disk port, USB2.0 standard						
	USB-B	USB download port, USB2.0 standard						
Electrical feature	Ethernet port	/	/	Standard RJ45	/	/	Standard RJ45	
	Input voltage	DC24V (voltage range: DC22V-DC26V)						
	Consumption current	200mA				270mA		
Environment	Allowable instantaneous power failure	Below 10ms (actual power loss less than 1s)						
	Withstand voltage	AC1000V, 10mA, less than 1 minute (signal and ground)						
	Insulation impedance	DC500V, above 10MΩ						
	Operation temperature	0-50°C						
	Storage temperature	-20-60°C						
	Ambient humidity	10%RH-90%RH (no condensation)						
	Anti-interference	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute						
Dimension	Ambient air	No corrosive gas						
	Cooling method	Natural air cooling						
	Protection level	Front panel IP65						
	Display area (mm)	154.08*85.92				219.6*131.76		
External dimension (mm)	206.0*147.0*35.0				277.0*191.7*37.5			
Opening size (mm)	192.3*138.6 (±0.5)				260.2*179.7 (±0.5)			
Authentication	CE marked							

Dimension (Unit: mm)

TS3-700-M/E/Z

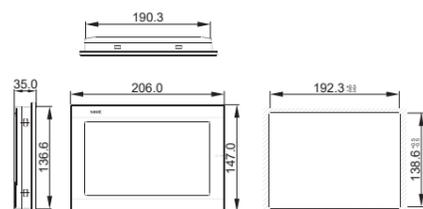

TS3-1000-M/E/Z

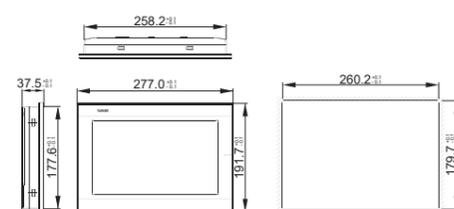

Economical HMI

TS2 series

4.3" 7"

- New exterior design, simple industrial style
- Based on Linux systems and relying on existing TouchWinPro software
- Adopting a mature hardware design scheme, equipped with an efficient A7 dual core 1GHz processor
- Compatible with existing product opening sizes, stable, durable, efficient, and convenient
- The front panel meets the IP65 protection level and supports free installation in four directions, meeting the requirements of different occasions




Product specification


Product models	TS2-400-Z	TS2-400-E	TS2-700-Z	TS2-700-E	
Product feature	Size	4.3"		7.0"	
	LCD	TFT LCD display with LED backlight			
	Resolution	480*272		800*480	
	Brightness	200 cd/m ²			
	Touch panel	Four-wire resistive touch panel			
	Service life	Above 30000 hours, ambient temperature 25°C, 24 hours operation			
	Language	Chinese, English, Japanese, Russian, German, etc.			
	Character size	Any font and size			
	Processor	Cortex-A7 1GHz			
	Memory	64MB			
Interface	Software	TouchwinPro programming software			
	COM1	RS232, communicate with PLC and other devices			
	COM2	RS485, communicate with PLC and other devices			
	Ethernet port	/	Standard RJ45	/	Standard RJ45
Environment	USB-A	USB-A (compliant with USB2.0 specifications), USB port, used to connect portable storage devices such as USB drives, can import and export data, and can connect devices such as mouse and keyboards			
	USB-B	USB-B (compliant with USB2.0 specifications), USB download port, used for downloading HMI program data			
	Power supply	DC24V (voltage range: DC22V-DC26V)			
Dimension	Operation temperature	0-50°C			
	Storage temperature	-10-60°C			
	Ambient humidity	10%RH-90%RH (no condensation)			
	Protection level	Front panel IP65			
External dimension (mm)	130.3*104.3*30.5		206*147*34.3		
Opening size (mm)	119.8*93.8 (±0.5)		192.3*138.6 (±0.5)		
Authentication	CE marked				

Dimension (Unit: mm)


TS2-400-Z/E

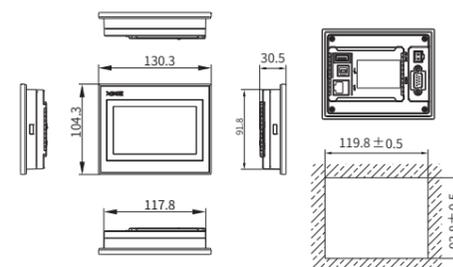

TS2-700-Z/E

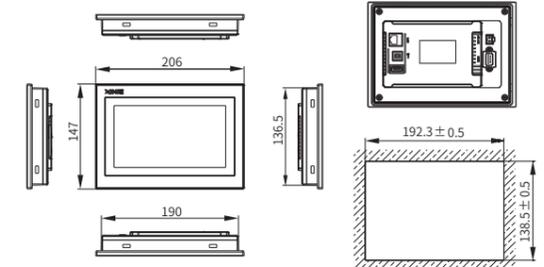

TouchWin Pro software

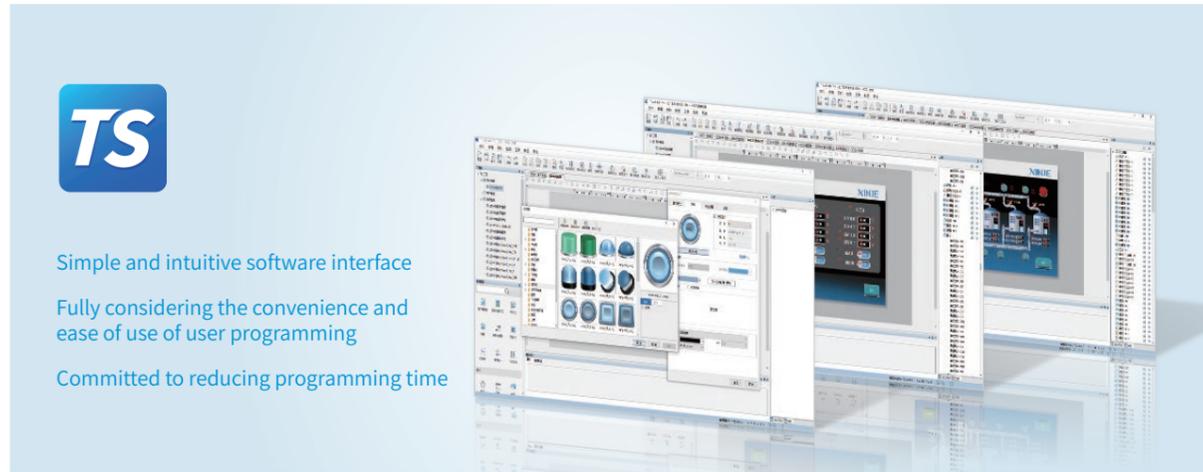


Simple and intuitive software interface

Fully considering the convenience and ease of use of user programming

Committed to reducing programming time


Built-in Model Selection Function

The software has built-in model selection function, which can quickly match the required product model according to your requirements.

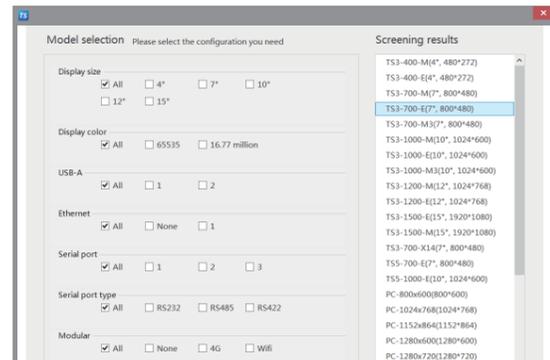


Rich Material Library

The newly designed material library has a variety of materials to choose from, and pictures can be found through color, shape and so on.

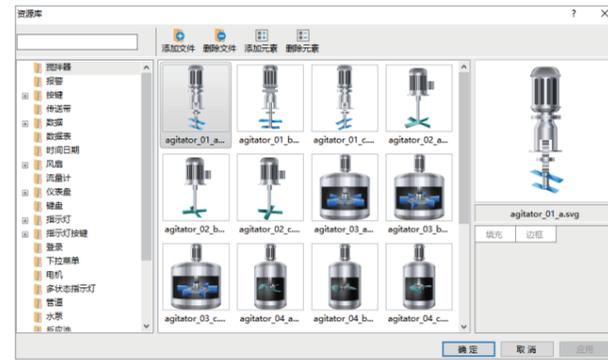

Powerful Recipe Management

The new recipe management is simple and easy to edit. It supports editing recipe data on the touch screen, including inserting, deleting, importing, exporting and other operations.

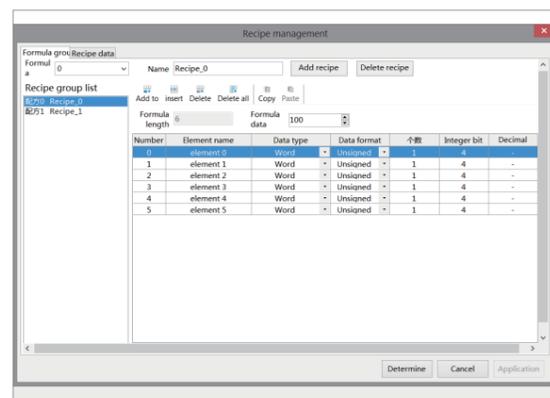


Detailed Report Management

The report management method supports the display of tables in forward order/ reverse order. You can query data or alarm records by date and keyword. It can be imported/exported to USB flash disk.




Traceable Operation Records

Record user login and operation contents, which can be exported to USB flash disk to help analyze process flow and troubleshooting.

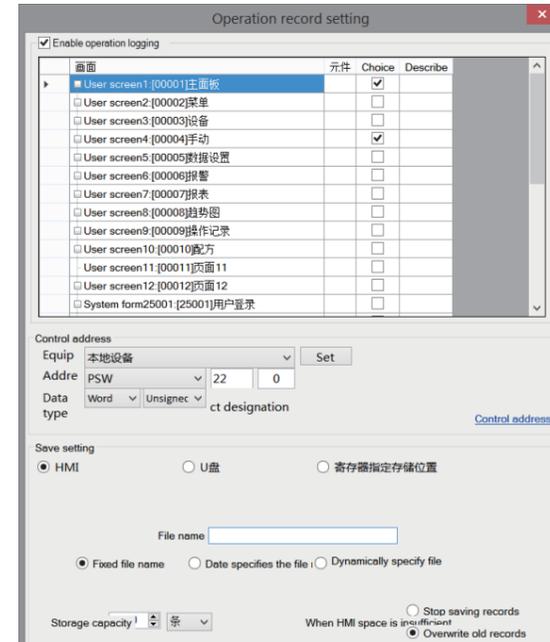


Schedule

With timer function, it can set the time and execute it regularly, making the on-site operation more efficient.

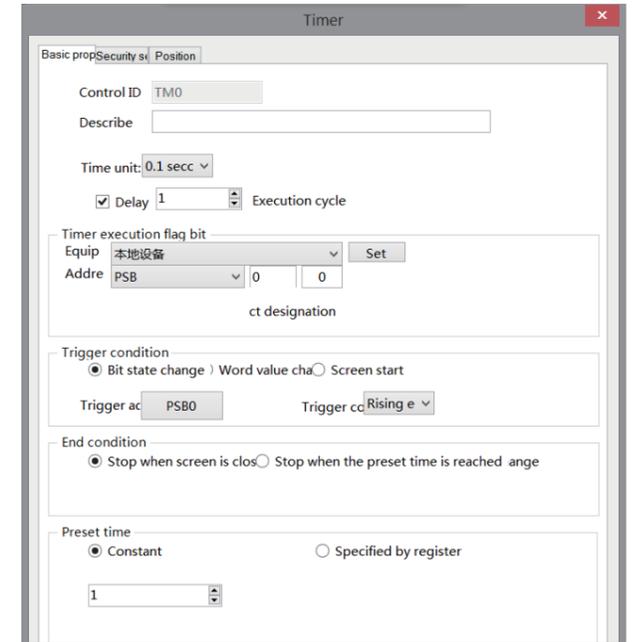

Address Label Library

The text, address and equipment in the program shall be uniformly managed to facilitate searching and checking.

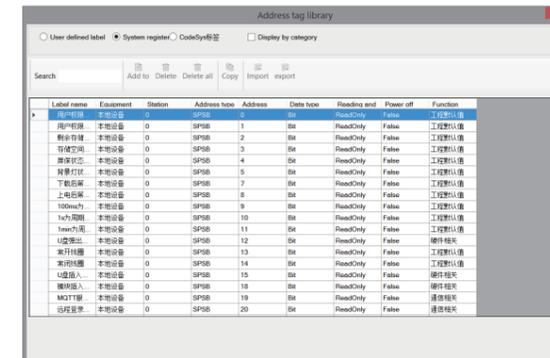


Multiple Encryption Methods

A variety of encryption methods, including delay, interlock, user level and installment payment.



Multilingual Management

It supports up to 8 languages and is more convenient to use through multi-language label library management.

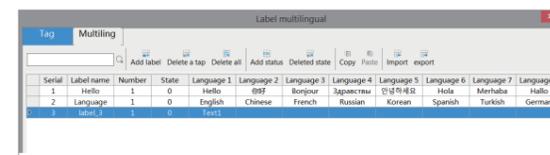

Support C Language Programming

Support C language function block, which are simple, fast and easy to learn, and support online debugging.

TG series general HMI

3.7-15.6 inches full coverage, 13 branch products to meet a variety of interaction needs of your industrial site



Suitable for many occasions

- TG general model
- TG(G) gray ultrathin model
- TG(S) black ultrathin model



Suitable for harsh environment

- TG(P) Site environment with heavy oil pollution
- TGM(D) Site environment with severe temperature requirements



Suitable for special occasions

- TGM(B) Vehicle, medical, testing
- CCSG Special for marine ships
- TGM(L) Outdoor occasions



Suitable for network demand occasions

- TGM Ethernet communication



Suitable for basic occasions

- TG(S/G)-XT Cost effective
- OP key type operate panel



Suitable for handheld operation

- MTG handheld wireless operation, built-in mobile power supply
- RT can be operated with one hand and two hands, which is convenient for field test equipment



High hardware configuration for higher performance

CPU ARM9 core Main frequency 400MHz	Memory 128MB/64MB	Storage 128MB	Color 16.77 million	Capacity 4 million words Power off holding area
--	-----------------------------	-------------------------	-------------------------------	--

Download, start and run trinity ultra-high speed response



USB high-speed data transmission can greatly reduce the program download time and facilitate debugging



Greatly improve the startup speed and reduce the waiting time



Smoother screen switching and animation effect

Flexible installation and free choice

Vertical installation or horizontal installation can be freely selected according to the actual needs of the site.

Excellent performance

Rich interface and powerful communication capability



Flexible connection and support communication of multiple devices


Flexible connectivity, direct communication with multiple devices

- It can be directly connected with PLC of various mainstream brands such as Mitsubishi, Siemens, Omron and Schneider, and communicate with various frequency converters and controllers such as Mitsubishi, Delta and Inovance.
- It supports communication with standard Modbus protocol controllers, and can connect multiple controllers supporting Modbus protocol at the same communication port, such as PLC, frequency converter, servo driver, instrument, etc.
- Support free protocol communication, and realize free communication of various instruments by flexible programming in C language.



Support micro printer


- The download port can directly drive the micro printer, panel printer and thermal printer with RS232 interface, so as to realize the real-time printing of engineering data and acquisition curve.

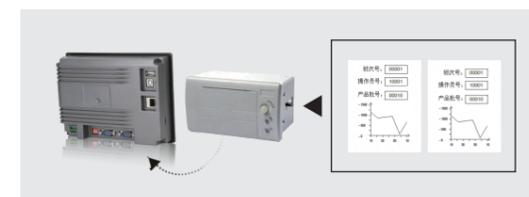

Rich download methods


Program download based on USB-B interface

- USB-B interface complies with USB2.0 standard interface, connect the computer with the USB-B port for high-speed data transmission and picture download through the USB communication cable, greatly shorten the download time and make it more convenient for users to debug the program.

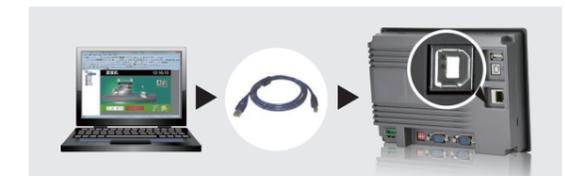

Use USB flash disk to quickly import the program through USB-A interface

- TG series models equipped with USB-A interface can directly download the program to HMI without computer but through USB flash disk. The download process is simple and fast, which is conducive to the confidentiality of the program. It is applicable to the situation that the program needs to be upgraded but there is no computer or download cable, saving time and cost.

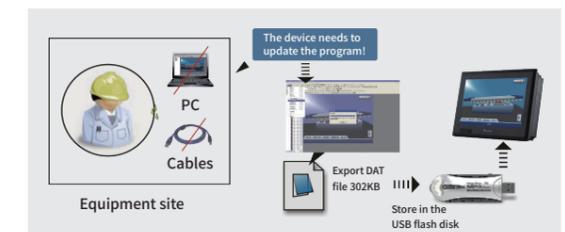


Excellent performance

From independent stand-alone to network communication, multiple networking mode


Support Ethernet communication, improve communication speed, suitable for complex field environment

- Standard RJ45 Ethernet port
- It can form an open network structure with Modbus TCP devices, Siemens S7-1200, S7-300, Mitsubishi Melsec series, Keyence KV5000, LSXGT, Omron Fins TCP series and A-BOX-U.

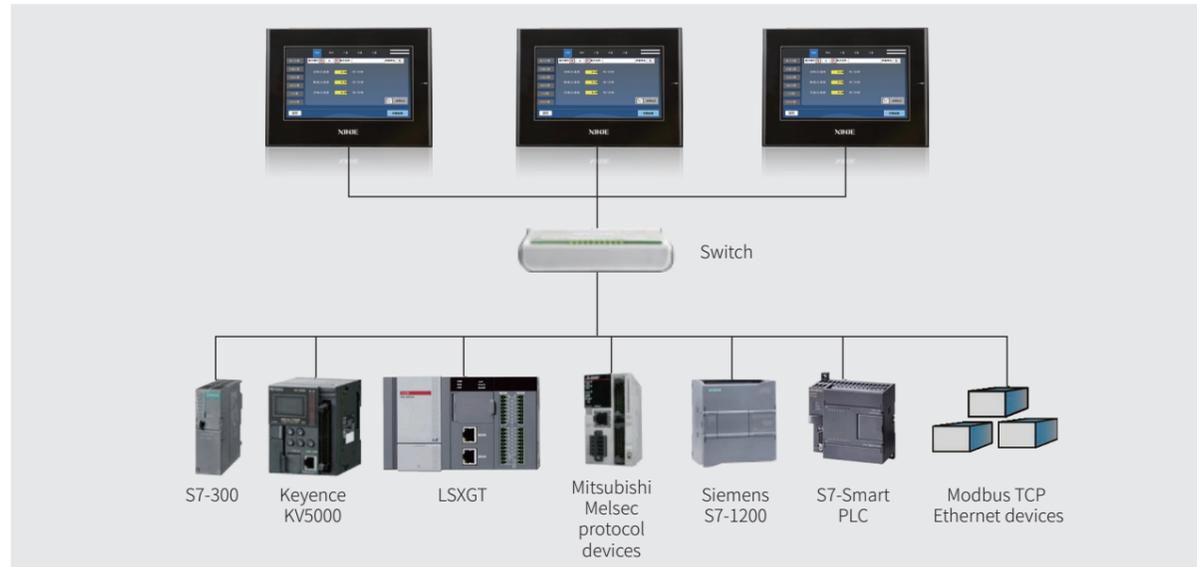

Various networking modes

- It can be networked according to the traditional master-slave mode or through X-NET bus.

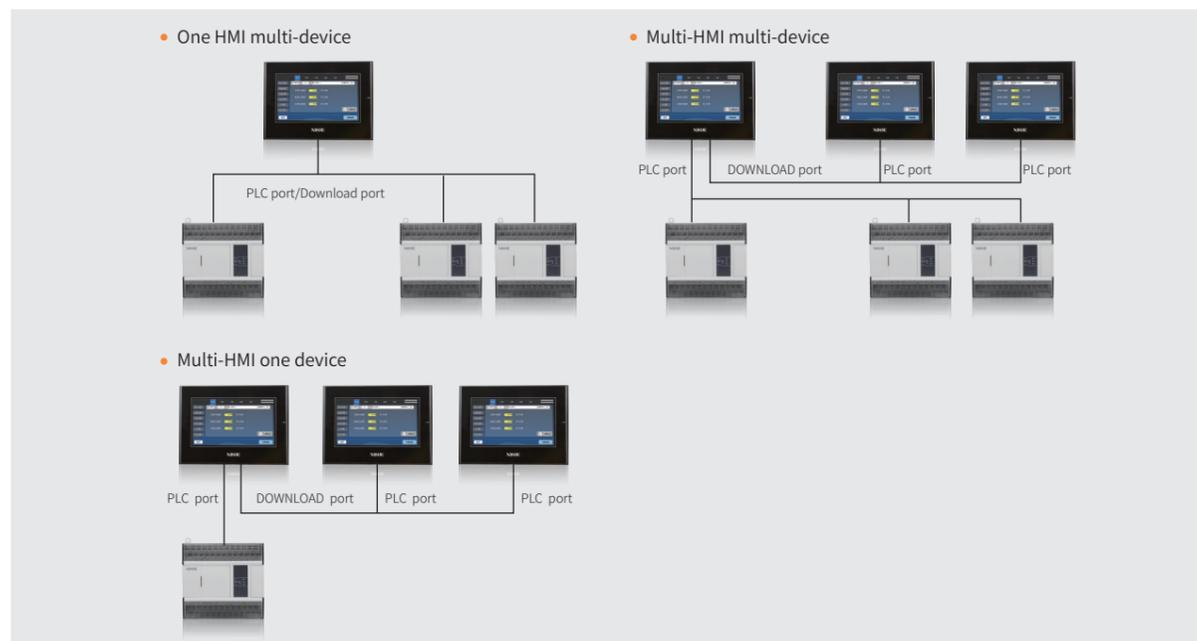

Wide temperature metal HMI

TGM (D) series 10.1" 7"


- New appearance and structure design, centralized interface
- Ultra thin body
- The metal cover of the whole machine greatly improves the anti-interference and heat dissipation
- The temperature range is -20°C~70°C, suitable for the site environment with high temperature requirements
- More industrial chips are adopted, and the performance is more stable



Product specification

Product model		TGMA63D-ET	TGM765D-ET
Product features	Display size	10.1"	7"
	Resolution	1024*600	800*480
	LCD	TFT LCD display, LED backlight	
	Display color	16.77million colors	
	Brightness	200 cd/m ²	
	Touch panel	Four-wire resistive touch screen	
	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation	
	Memory	128MB	
Interface	PLC port	RS232/RS485/RS422	
	Download port	RS232/RS485	/
	USB-A port	USB flash disk port, USB2.0 standard	
	USB-B port	USB download port, USB2.0 standard	
	Ethernet port	Standard RJ45	
Electrical features	Input voltage	DC24V (voltage range: DC22V-DC26V)	
	Consumption current	270mA	200mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)	
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute (signal and ground)	
	Insulation resistance	Above10MΩ, DC500V	
Environment	Operation temperature	-20-70°C	
	Storage temperature	-30-75°C	
	Operation humidity	10%RH-90%RH (no condensation)	
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute	
	Air	No corrosive gas	
	Cooling mode	Natural air cooling	
	Protection level	Front cover IP65	
Dimension	External dimension (mm)	276.9*191.6*34.8	206.0*147.0*34.6
	Opening size (mm)	260.2*178.7	192.3*138.6

Appearance dimension drawing (Unit: mm)

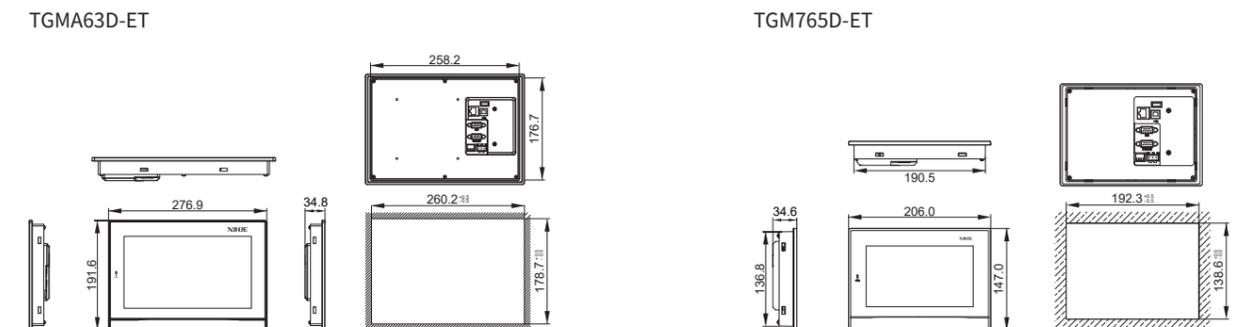

New appearance HMI

TG (G) series 10.1" 7" 4.3"


- The gray appearance design of the whole machine has strong visual impact
- Improved cover material, frosted texture
- The function and performance are the same to TG(S) series



Product specification

Product model		TGA63G-MT TGA63G-UT TGA63G-ET	TG765G-MT TG765G-UT TG765G-ET	TG465G-UT TG465G-ET
Product features	Display size	10.1"	7"	4.3"
	Resolution	1024*600	800*480	480*272
	LCD	TFT LCD display, LED backlight		
	Display color	16.77million colors		
	Brightness	200 cd/m ²		
	Touch panel	Four-wire resistive touch screen		
Interface	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation		
	Memory	128MB		
	PLC port	RS232/RS422/RS485	RS232/RS422/RS485	RS232/RS485/RS422 (XT model cannot support RS422)
	Download port	RS232/RS485	RS232/RS485	/
	USB-A port	USB flash disk port, USB2.0 standard. UT/ET model can support		
	USB-B port	USB download port, USB2.0 standard		
Electrical features	Ethernet port	Standard RJ45, ET model can support		
	Input voltage	DC24V (voltage range: DC22V~DC26V)		
	Consumption current	270mA	200mA	180mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)		
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute		
	Insulation resistance	Above 10MΩ, DC500V		
Environment	Operation temperature	0°C~ 50°C		
	Storage temperature	-20°C~ 60°C		
	Operation humidity	10%RH-90%RH (no condensation)		
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute		
	Air	No corrosive gas		
	Cooling mode	Natural air cooling		
Dimension	Protection level	Front cover IP65		
	External dimension (mm)	278.0*192.3*44.0	207.0*148.0*38.5	152.6*102.0*33.4
	Opening size (mm)	260.2*179.7	192.0*138.5	144.0*94.0

Appearance dimension drawing (Unit: mm)

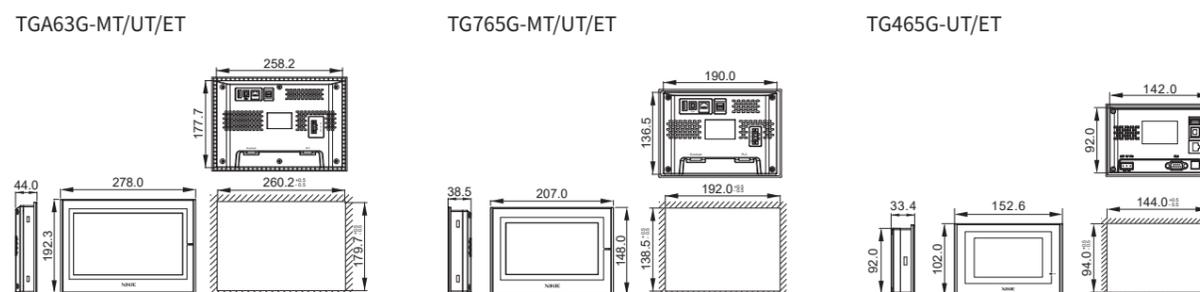

Ultrathin type HMI

TG (S) series 10.1" 7"


- Ultrathin and fashionable appearance design, 7" model thickness as low as 38.5mm
- The plastic cover made of PC and ABS alloy material (or flame retardant material) is more solid and durable
- Optimize the snap-fit design to effectively reduce the entry of external dust and oil stain
- The communication interface faces down to effectively save installation space



Product specification

Product model		TGA63S-MT TGA63S-UT TGA63S-ET	TG765S-MT TG765S-UT TG765S-ET
Product features	Display size	10.1"	7"
	Resolution	1024*600	800*480
	LCD	TFT LCD display, LED backlight	
	Display color	16.77 million colors	
	Brightness	200 cd/m ²	
	Touch panel	Four-wire resistive touch screen	
Interface	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation	
	Memory	128MB	
	PLC port	RS232/RS422/RS485	
	Download port	RS232/RS485	
	USB-A port	USB flash disk port, USB2.0 standard. UT/ET model can support	
	USB-B port	USB download port, USB2.0 standard	
Electrical features	Ethernet port	Standard RJ45, ET model can support	
	Input voltage	DC24V ((voltage range: DC22V~DC26V)	
	Consumption current	270mA	200mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)	
	Withstand voltage shock	Above AC1000V, 10mA, less than 1 minute	
	Insulation resistance	10MΩ, DC500V	
Environment	Operation temperature	0°C~ 50°C	
	Storage temperature	-20°C~ 60°C	
	Operation humidity	10%RH-90%RH (no condensation)	
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute	
	Air	No corrosive gas	
	Cooling mode	Natural air cooling	
Dimension	Protection level	Front cover IP65	
	External dimension (mm)	278.0*192.3*44.0	207.0*148.0*38.5
	Opening size (mm)	260.2*179.7	192.0*138.5

Appearance dimension drawing (Unit: mm)

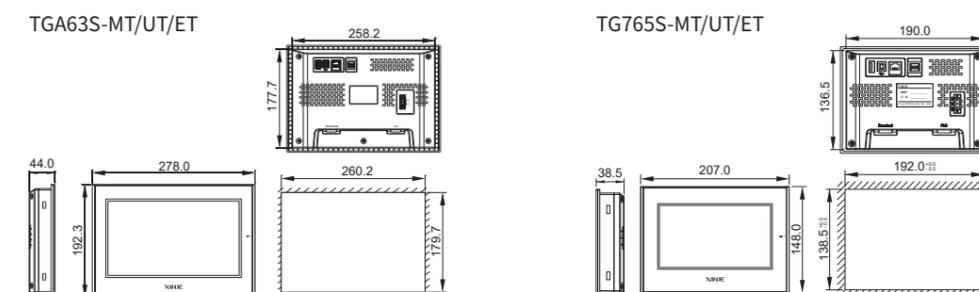

Network type HMI


TGM series 15.6" 10.1" 8" 7" 4.3"

- With penetration function, can upload/download Xinje XD/XL/XG series PLC program through the HMI
- Support three download modes: Ethernet, USB-B, USB flash disk import program
- Ethernet port supports LAN and WAN connection, which is more convenient to use



Remote upload/download HMI program through Ethernet port


- TGM series HMI supports three download modes: Ethernet download, USB-B download, USB flash disk import. Ethernet download supports LAN and WAN, greatly improves the download speed and facilitates program debugging and later maintenance.

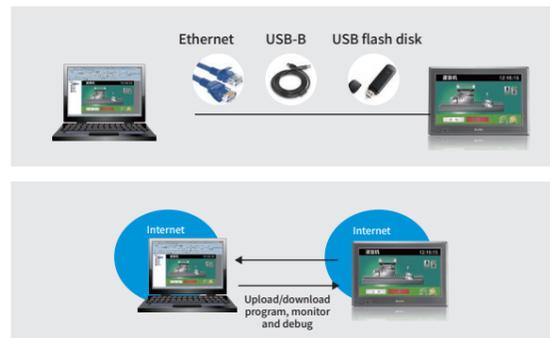

Penetration function

Support Ethernet communication, improve communication speed, suitable for complex field environment

- Xinje XG/XL/XD series PLC program can be downloaded/uploaded and monitored through the HMI. The connection method can be Ethernet or USB. Ethernet mode supports LAN and remote operation.

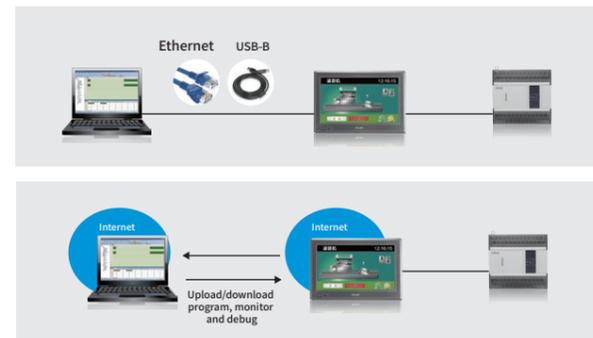


Product specification


Product model		TGMC65-ET	TGMA63S-MT TGMA63S-ET	TGM865-ET	TGM765S-MT TGM765S-ET	TGM465-MT2 TGM465-ET
Product features	Display size	15.6"	10.1"	8"	7"	4.3"
	Resolution	1366*768	1024*600	800*600	800*480	480*272
	LCD	TFT LCD display, LED backlight				
	Display color	16.77 million colors				
	Brightness	250 cd/m ²	200 cd/m ²			
	Touch panel	Four-wire resistive touch screen				
	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation				
Interface	Memory	128MB				
	PLC port	RS232/RS422/RS485				
	Download port	RS232/RS485 (TGM465-ET no download port)				
	USB-A port	USB flash disk port, USB2.0 standard				
	USB-B port	USB download port, USB2.0 standard				
	Ethernet port	Standard RJ45, ET model can support				

Appearance dimension drawing (Unit: mm)


TGMC65-ET

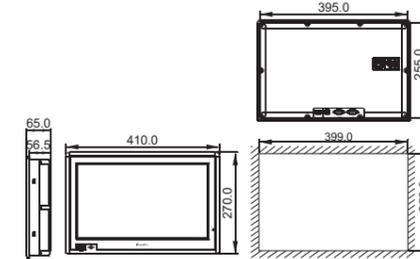


TGMA63S-MT/ET

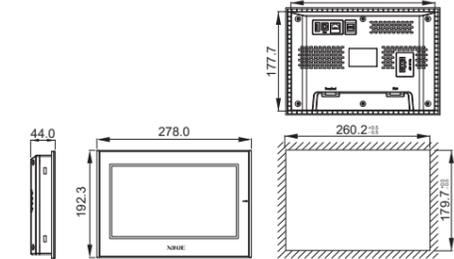


TGM865-ET

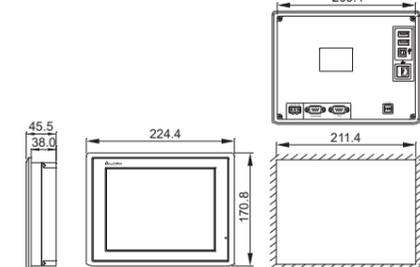


TGM765S-MT/ET

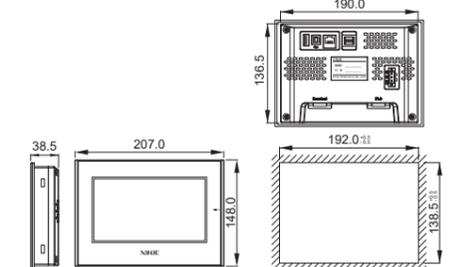

TGM465-ET

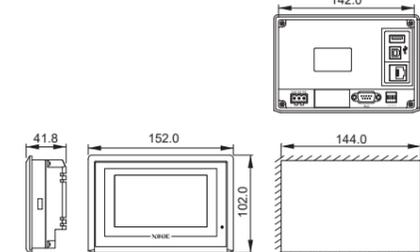

TGM465-MT2

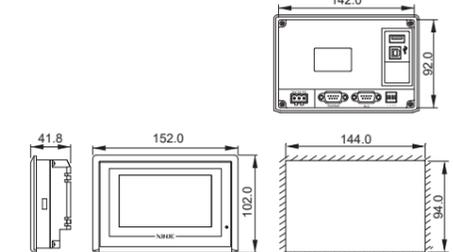

Product specification

Product model		TGMC65-ET	TGMA63S-MT TGMA63S-ET	TGM865-ET	TGM765S-MT TGM765S-ET	TGM465-MT2 TGM465-ET
Electrical features	Input voltage	DC24V (voltage range: DC22V~DC26V)				
	Consumption current	730mA	270mA	250mA	200mA	180mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)				
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute				
	Insulation resistance	Above 10MΩ, DC500V				
Environment	Operation temperature	0°C~ 50°C				
	Storage temperature	-20°C~ 60°C				
	Operation humidity	10%RH~90%RH (no condensation)				
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute				
	Air	No corrosive gas				
	Cooling mode	Natural air cooling				
Dimension	Protection level	Front cover IP65				
	External dimension (mm)	410.0*270.0*65.0	278.0*192.3*44.0	224.4*170.8*45.5	207.0*148.0*38.5	152.0*102.0*41.8
	Opening size (mm)	399.0*259.0	260.2*179.7	211.4*157.8	192.0*138.5	144.0*94.0

General HMI

TG series 15.6" 10.1" 8" 7" 4.3"

- Covering complete display size, the product lineup is abundant
- It has various functions and is suitable for most industrial sites
- USB-A front port design, easy to use (TGC65, TGA62 support)



■ USB-A front interface design, more convenient operation TGC65/TGA62support

USB-A interface is used for data import and export. This interface is designed on the front of the panel. When transmitting data, there is no need to open the control cabinet. It is easy to operate and greatly improves the work efficiency.




Product specification


Product model	TGC65-ET	TGA63-MT TGA63-UT TGA63-ET	TGA62-MT TGA62-ET	TG865-MT TG865-ET	TG765-MT TG765-UT TG765-ET	TG465-MT TG465-UT TG465-ET	TG465-MT2 TG465-UT2 TG465-XT
Display size	15.6"	10.1"	10.1"	8"	7"	4.3"	
Resolution	1366*768	1024*600	800*480	800*600	800*480	480*272	
LCD	TFT LCD display, LED backlight						
Display color	16.77 million colors						
Brightness	250 cd/m ²	200 cd/m ²					
Touch panel	Four-wire resistive touch screen						
LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation						
Memory	128MB						
PLC port	RS232/RS422/RS485						
Download port	RS232/RS485					RS232/RS485 (only -MT2/UT2 model support)	
USB-A port	USB flash disk port, USB2.0 standard. UT/ET model can support						
USB-B port	USB download port, USB2.0 standard						
Ethernet port	Standard RJ45, ET model can support						
Input voltage	DC24V (voltage range: DC22V~DC26V)						
Consumption current	730mA	270mA	250mA	200mA	180mA		
Allowable power loss	Below 10ms (actual power loss less than 1s)						
Withstand voltage shock	AC1000V, 10mA, less than 1 minute						
Insulation resistance	Above 10MΩ, DC500V						
Operation temperature	0°C~50°C						
Storage temperature	-20°C~60°C						
Operation humidity	10%RH-90%RH (no condensation)						
Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute						
Air	No corrosive gas						
Cooling mode	Natural air cooling						
Protection level	Front cover IP65						
External dimension (mm)	410.0*270.0*65.0	272.2*191.7*51.2	272.2*191.7*51.2	224.4*170.8*45.5	200.4*146.9*48.5	152.0*102.0*41.8	
Opening size (mm)	399.0*259.0	260.2*179.7	260.2*179.7	211.4*157.8	192.0*138.5	144.0*94.0	

Appearance dimension drawing (Unit: mm)


TGC65-ET

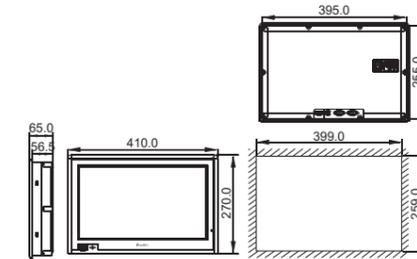


TGA63-MT/UT/ET/NT

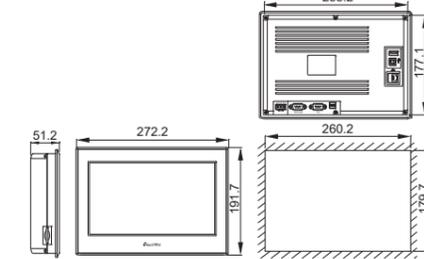


TGA62-MT/ ET

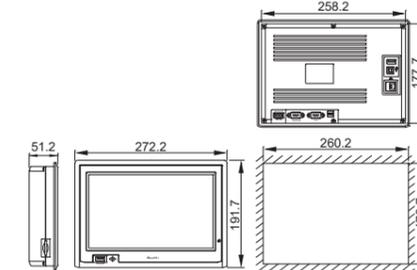


TG865-MT/ ET

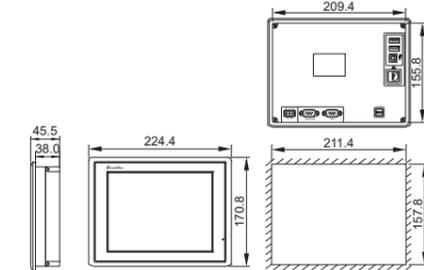


TG765-MT/ UT/ ET

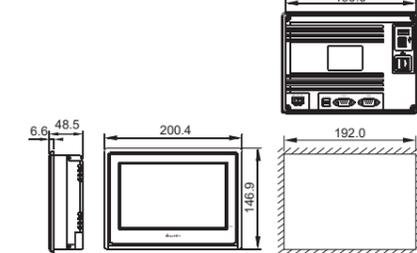

TG465- MT2/ UT2

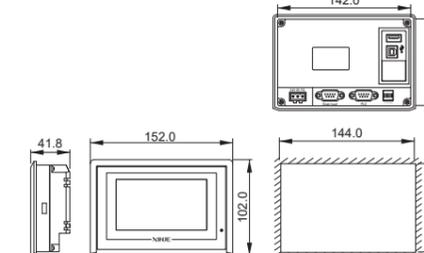

TG465-MT/ UT/ ET/ XT

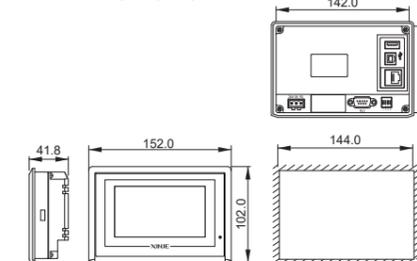

Highlight type HMI

TGM(L) series 7"

- Based on the network series products (TGM), the brightness is increased to 530, which can be used in outdoor occasions




Product specification

Product model		TGM765L-MT	TGM765L-ET
Product features	Display size	7"	
	Resolution	16.77 million colors	
	LCD	800*480	
	Display color	530 cd/m ²	
	Brightness	Four-wire resistive touch screen	
	Touch panel	Above 50000 hours, ambient temperature 25°C, 24-hour operation	
Interface	LCD life	128MB	
	Memory	RS232/RS485/RS422	
	PLC port	RS232/RS485	
	Download port	USB flash disk port, USB2.0 standard	
	USB-A port	USB download port, USB2.0 standard	
Electrical features	USB-B port	/	Standard RJ45
	Ethernet port	DC24V (voltage range: DC22V~DC26V)	
	Input voltage	200mA	
	Consumption current	Below 10ms (actual power loss less than 1s)	
Environment	Allowable power loss	AC1000V, 10mA, less than 1 minute (signal and ground)	
	Withstand voltage shock	Above 10MΩ, DC500V (signal and ground)	
	Insulation resistance	0-50°C	
	Operation temperature	-20-60°C	
	Storage temperature	10%RH-90%RH (no condensation)	
	Operation humidity	10~25Hz (X, Y, Z direction each 30 minutes 2G)	
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute	
	Air	No corrosive gas	
	Cooling mode	Front cover IP65	
	Protection level	Natural air cooling	
Dimension	External dimension (mm)	207.0*148.0*38.5	
	Opening size (mm)	192.0*138.5	

Appearance dimension drawing (Unit: mm)

TGM765L-MT/ET

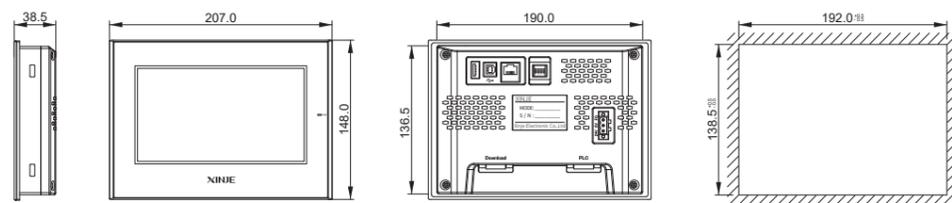

Oil resistant type HMI

TG (P) series 10.1" 7" 4.3"

- The oil resistant type redesign the upper cover and film on the basis of the general TG series products, and increase the width of the back glue of the film, so as to achieve the purpose of more oil resistance on the front
- It is applicable to the environment with heavy oil pollution, and other functions are the same as the general type



Product specification


Product model		TGA62-MT(P) TGA62-ET(P)	TG765-MT(P) TG765-UT(P)	TG765-XT(P)-C	TG465-MT(P)
Product features	Display size	10.1"	7"	7"	4.3"
	Resolution	800*480	800*480	800*480	480*272
	LCD	TFT LCD display, LED backlight			
	Display color	16.77 million colors			
	Brightness	200 cd/m ²			
	Touch panel	Four-wire resistive touch screen			
Interface	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation			
	Memory	128MB			
	PLC port	RS232/RS422/RS485		RS232	RS232/RS422/RS485
	Download port	RS232/RS485		/	/
	USB-A port	USB flash disk port, USB2.0 standard, UT(P)/ET(P) models support			
Electrical features	USB-B port	USB download port, USB2.0 standard			
	Ethernet port	Standard RJ45, ET(P) models support		/	/
	Input voltage	DC24V (voltage range: DC22V~DC26V)			
	Consumption current	270mA	200mA	200mA	180mA
Environment	Allowable power loss	Below 10ms (actual power loss less than 1s)			
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute			
	Insulation resistance	Above 10MΩ, DC500V			
	Operation temperature	0°C~50°C			
	Storage temperature	-20°C~60°C			
	Operation humidity	10%RH~90%RH (no condensation)			
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute			
	Air	No corrosive gas			
	Cooling mode	Natural air cooling			
	Protection level	Front cover IP65			
Dimension	External dimension (mm)	272.2*191.7*51.2	200.4*146.9*48.5	200.4*146.9*48.5	152.0*102.0*41.8
	Opening size (mm)	260.2*179.7	192.0*138.5	192.0*138.5	144.0*94.0

Appearance dimension drawing (Unit: mm)

TGA62-MT(P)/ ET(P)

TG765-MT(P)/ UT(P) /XT(P)-C

TG465-MT(P)

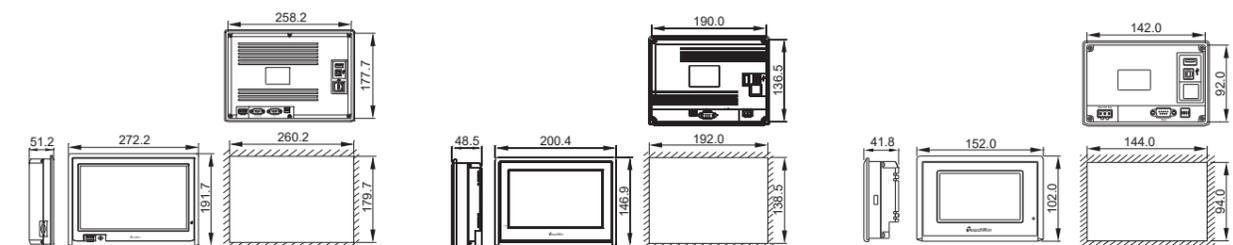

Economic type HMI

Economic type TG series 7" 4.3"



TG-ZT

- On the basis of general type TG/ultra-thin type TG(S)/new appearance TG(G) series products, one or two RS232 serial ports are reserved, with standard clock function
Note: the serial port only supports RS232 communication mode

TG-ZT


- Remove RS422 communication mode on the basis of new appearance TG(G) series products
Note: the internal register PFW is stored every 1 minute

Product specification


Product model		TG765-XT-C	TG765S-XT	TG765G-XT	TG765G-ZT	TG465G-ZT
Product features	Display size	7"				
	Resolution	800*480				
	LCD	TFT LCD display, LED backlight				
	Display color	16.77million colors	16.77million colors	16.77 million colors	65535 colors	
	Brightness	200 cd/m ²				
	Touch panel	Four-wire resistive touch screen				
	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation				
Interface	Memory	128MB	128MB	128MB	64MB	
	PLC port	RS232	RS232	RS232	RS232/RS485	RS485
	Download port	/	RS232	RS232	RS232	RS232
	USB-A port	/	/	/	USB-A (USB2.0 standard), USB flash disk port	
	USB-B port	USB-B (USB2.0 standard), USB download port				
Electrical features	Ethernet port	/				
	Input voltage	DC24V (voltage range: DC22V~DC26V)				
	Consumption current	200mA				180mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)				/
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute				/
Environment	Insulation resistance	Above 10MΩ, DC500V				/
	Operation temperature	0°C~50°C				
	Storage temperature	-20°C~60°C				
	Operation humidity	10%RH-90%RH (no condensation)				
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute				
	Air	No corrosive gas				
	Cooling mode	Natural air cooling				
Dimension	Protection level	Front cover IP65				
	External dimension (mm)	200.4*146.9*48.5	206.0*147.0*38.6	206.0*147.0*38.6	206.0*147.0*38.6	130.3*104.3*29.8
	Opening size (mm)	192.0*138.5				119.0*93.0

Appearance dimension drawing (Unit: mm)


TG765-XT-C

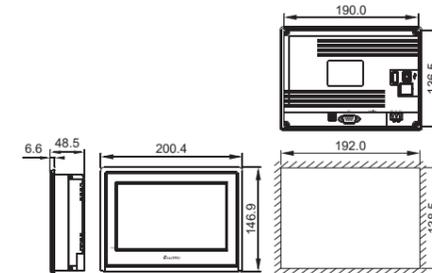


TG765S-XT

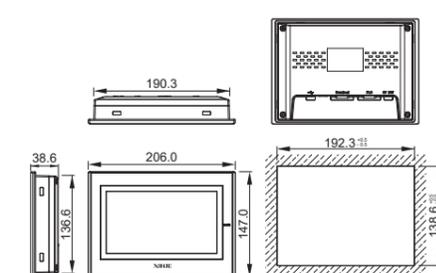

TG765G-XT/ZT

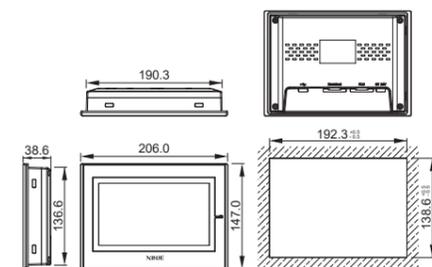

TG465G-ZT

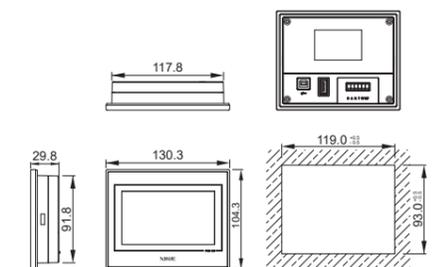

Embedded without border HMI

TGM(B) series 10.1" 7" 4.3"


- No front cover, rear installation, greatly reducing the installation space
- It fits closely with the surface of the equipment for better fusion
- Users can design their own mask to meet the needs of personalized customization
- It is especially suitable for vehicle, medical, testing and other applications



Product specification

Product model		TGMA63B-ET	TGM765B-MT/UT	TGM465B
Product features	Display size	10.1"	7"	4.3"
	Resolution	1024*600	800*480	480*272
	LCD	TFT LCD display, LED backlight		
	Display color	16.77 million colors		
	Brightness	200 cd/m ²		
	Touch panel	Four-wire resistive touch screen		
	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation		
Interface	Memory	128MB		64MB
	PLC port	RS232/RS485/RS422		RS485
	Download port	RS232/RS485	/	RS232
	USB-A port	USB flash disk port, USB2.0 standard, ET models support USB		
	USB-B port	USB download port, USB2.0 standard		
Electrical features	Ethernet port	Standard RJ45 port, ET models support		
	Input voltage	DC24V (voltage range: DC22V~DC26V)		
	Consumption current	270mA	200mA	180mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)		
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute		
Environment	Insulation resistance	Above 10MΩ, DC500V		
	Operation temperature	0°C~50°C		
	Storage temperature	-20°C~60°C		
	Operation humidity	10%RH~90%RH (no condensation)		
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute		
	Air	No corrosive gas		
	Cooling mode	Natural air cooling		
Dimension	Protection level	/		
	External dimension (mm)	272.0*155.2*34.9	182.4*108.5*39.0	128.0*75.0*27.6
	Opening size (mm)	257.0*90	174.4*65.1	118.0*67.0

Appearance dimension drawing (Unit: mm)

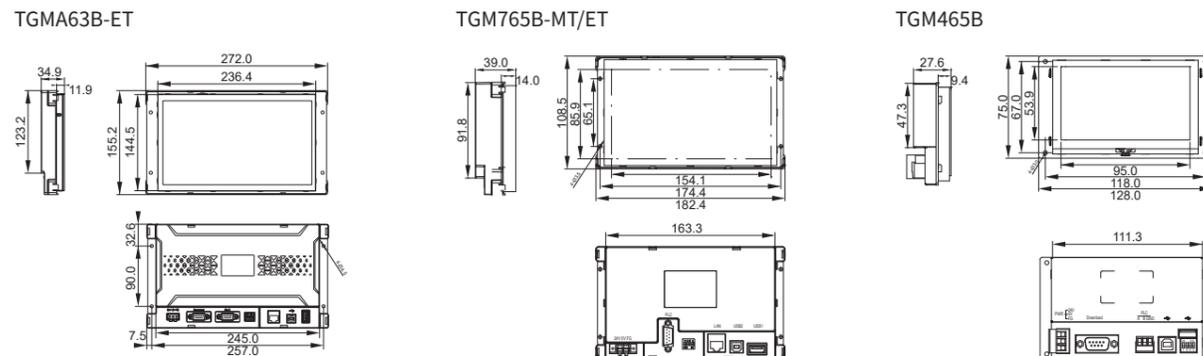

Handheld wireless HMI

MTG series 7"


- Exquisite appearance, handheld operation, more flexible
- Built-in mobile power supply, convenient charging and long battery life
- Wireless communication with PLC, fast air transmission speed (up to 115200bps), long communication distance and strong stability



Product specification

Product model		MTG765-HT
Product specification	Display size	7.0"
	Display color	16.77 million colors
	Resolution	800*480
	Brightness	Adjustable (system register PFW100)
	Touch panel	Four-wire resistive touch panel
	Service life	Above 50000 hours, ambient temperature 25°C, 24-hour operation
	Character setting	Chinese, English, Japanese, Russian, German, etc
Memory	Character size	Any font and size
	Memory	128MB
Screen features	Power	4W
	Charging parameters	5.0V-2.0A 9.0V-2.0A 12.0V-1.5A
	Endurance time (always on)	8 hours
	Charging time	<10 hours
Electrical features	Operation temperature	0-45°C
	Ambient humidity	10%RH-90%RH (no condensation)
	Ambient air	No corrosive gas
	Protection level	The front panel complies with IP65
	Cooling method	Natural air cooling
Structure	External dimension (mm)	217.1*158.0*36.6
	PLC port (built-in)	Built-in PLC port integrated wireless communication module
Product model	USB-A port	USB flash disk port, USB2.0 standard
	USB-B port	USB download port, USB2.0 standard
	Micro-USB	Micro-USB, USB charging port
	Ethernet port	Standard RJ45 port

Appearance dimension drawing (Unit: mm)

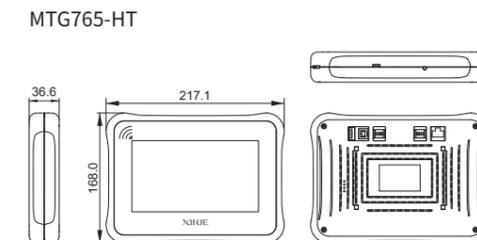

Handheld teaching pendant

RT760 series 7"

- Fully consider the convenience of use, ergonomic holding structure, easy to hold with one hand and two hands
- The back magnet design can liberate hands and mobile operation without place limit
- All round reassuring protection, and the protection grade of the whole machine can reach IP66
- Fast and convenient programming




Product specification

Product model		RT760
Product features	Display size	7"
	Resolution	800*480
	Display	16.77 million colors, TFT LCD display, LED backlight
	Brightness	200 cd/m ²
	Touch panel	Four-wire resistive touch panel
	Button	20 film buttons, the function can be set freely
Interface	Memory	128MB
	PLC port	RS485
	USB-A port	USB flash disk port, USB2.0 standard
Electrical features	USB-B port	USB download port, USB2.0 standard
	Input voltage	DC24V (voltage range: DC22V~DC26V)
	Consumption current	200mA
Environment	Allowable power loss	Below 10ms (actual power loss less than 1s)
	Operation temperature	0-50°C
	Storage temperature	-20-60°C
	Operation humidity	10%RH-90%RH (no condensation)
	Protection level	IP66 for the whole machine

Appearance dimension drawing (Unit: mm)

RT760

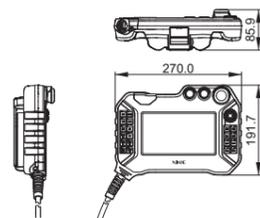

RT710/RT720/RT750 series 7"

- Convenient field equipment test, widely used in manufacturing and industrial robot industry
- Golden ratio grip feeling, extremely suitable for one hand or two hands operation habits
- Application development is simple and fast




Product specification


Product model		RT711	RT712	RT720	RT750
features	Size	7"			
	Resolution	800*480			
	Display	TFT LCD display, LED backlight, 16.77 million colors			
	Brightness	200 cd/m ²			
	Touch panel	Four-wire resistive touch panel			
	Button	/		12 membrane buttons	14 membrane buttons
	Brake switch	Emergency stop switch can effectively ensure the safety of the system in case of abnormal emergency			
	Memory	128MB			
	Communication port	RS485			
	USB-A port	USB flash disk port, USB2.0 standard			
	USB-B port	USB download port, USB2.0 standard	/	USB download port, USB2.0 standard	
	Input voltage	DC24V (voltage range: DC22V~DC26V)			
	Operation temperature	0-50°C			
	Storage temperature	-20-60°C			
Operation humidity	10%RH-90%RH (no condensation)				

Appearance dimension drawing (Unit: mm)


RT711

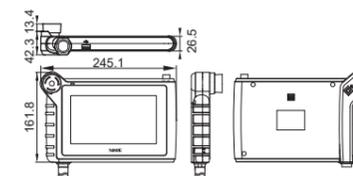


RT712



RT750

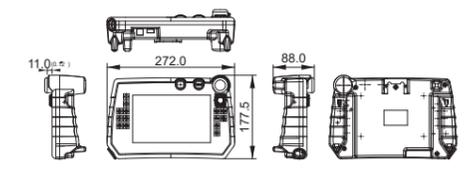

RT720

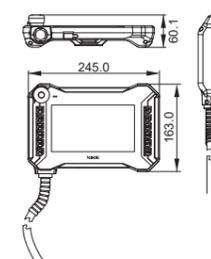

HMI special for ship navigation

CCSG series 15.6" 10.1" 7"


- Certified by China Classification Society, it is applicable to ships and marine facilities to meet the specific needs of the environment and ensure the stable and reliable operation of the system



| Product specification

Product model		CCSG-C65ET	CCSG-A62MT CCSG-A62ET	CCSG-765MT CCSG-765UT CCSG-765ET
Product features	Display size	15.6"	10.1"	7"
	Resolution	1366*768	1024*600	800*480
	LCD	TFT LCD display, LED backlight, 16.77 million colors		
	Display color	16.77 million colors		
	Brightness	250 cd/m ²	200 cd/m ²	
	Touch panel	Four-wire resistive touch panel		
	LCD life	Above 50000 hours, ambient temperature 25°C, 24-hour operation		
	Memory	128MB		
Interface	PLC port	RS232/RS422/RS485		
	Download port	RS232/RS485		
	USB-A port	USB flash disk port, USB2.0 standard, UT/ET models support		
	USB-B port	USB download port, USB2.0 standard		
	Ethernet port	Standard RJ45 port, ET models support		
Electrical features	Input voltage	DC24V (voltage range: DC22V~DC26V)		
	Consumption current	730mA	270mA	200mA
	Allowable power loss	Below 10ms (actual power loss less than 1s)		
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute		
	Insulation resistance	Above 10MΩ, DC500V		
Environment	Operation temperature	0°C~50°C		
	Storage temperature	-20°C~60°C		
	Operation humidity	10%RH~90%RH (no condensation)		
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute		
	Air	No corrosive gas		
Dimension	External dimension (mm)	410.0*270.0*65.0	278.0*192.3*44.0	207.0*148.0*38.5
	Opening size (mm)	399.0*259.0	260.2*179.7	192.0*138.5

| Appearance dimension drawing (Unit: mm)

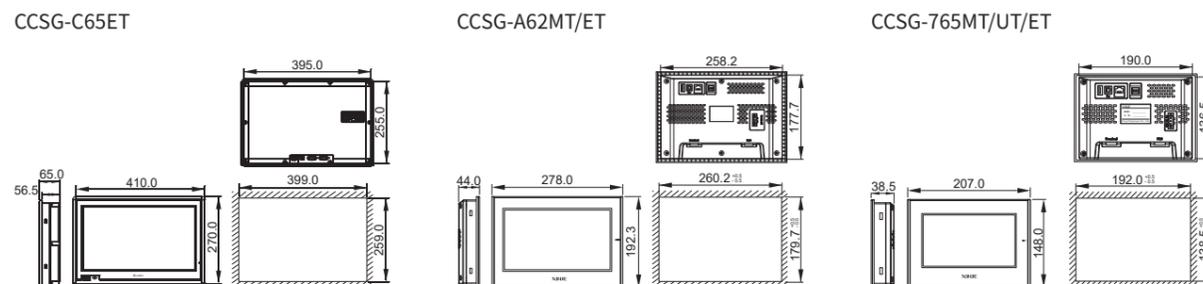

Operate panel

OP series 3.7"


- OP series button type small-sized HMI, small and exquisite appearance
- The key function can be customized and can replace the mechanical button
- It has the basic functions of alarm, password, clock (optional), display bitmap, PLC control screen switching and so on
- Support the mainstream PLC and other control equipment in the market



| Product specification

Product model		OP330	OP320-A OP320-A-S	OP320 OP320-S
Product features	Display size	3.7"		
	Resolution	192*64		
	LCD	STN		
	Display color	Yellow green color		
	Brightness	Potentiometer adjustable		
	Touch panel	Not support		
	LCD life	Above 20000 hours, ambient temperature 25°C, 24-hour operation		
	Memory	64KB FlashROM		
	Character setting	Chinese, English		
	Character size	Chinese: 16*16 32*32 English: 8*16 16*32		
Interface	Button	26	20	7
	Communication port	general models support RS232/RS422, (-S) model supports RS232/RS485		
	Download port	RS232		
	USB-A port	/		
	USB-B port	/		
Electrical features	Ethernet port	/		
	Input voltage	DC24V (DC22V~26V)		
	Consumption current	<140mA		
	Allowable power loss	Below 10ms (actual power loss less than 1s)		
	Withstand voltage shock	AC1000V, 10mA, less than 1 minute		
Environment	Insulation resistance	Above 10MΩ, DC500V		
	Operation temperature	0°C~50°C		
	Storage temperature	-20°C~60°C		
	Operation humidity	10%RH~90%RH (no condensation)		
	Anti-interference ability	Voltage noise: 1500Vp-p, pulse width 1us, 1 minute		
Dimension	Air	No corrosive gas		
	Cooling mode	Natural air cooling		
	Protection level	Front cover IP65		
	External dimension (mm)	172.0*121.0*56.5	172.0*94.0*30.0	162.0*102.0*38.0
	Opening size (mm)	164.0*113.0	164.2*86.8	156.5*94.0

| Appearance dimension drawing (Unit: mm)

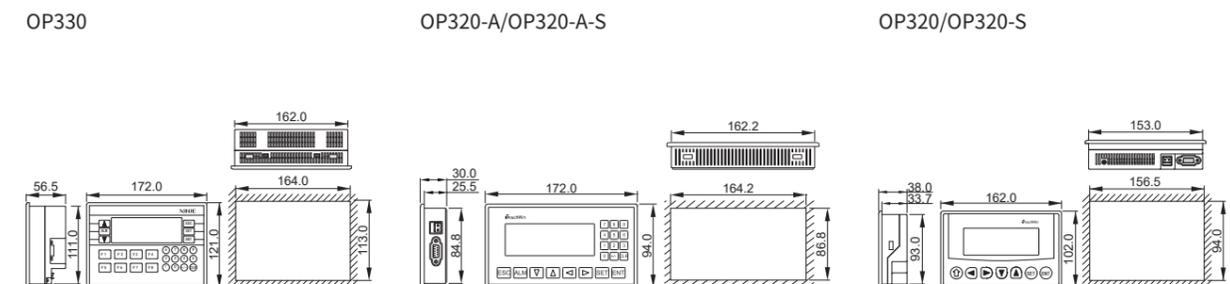

TouchWin

Outstanding picture expressiveness



■ Rich 3D gallery and components resources




■ Various character forms



■ Support multiple languages and simple switching




■ New animation editing method, rich performance

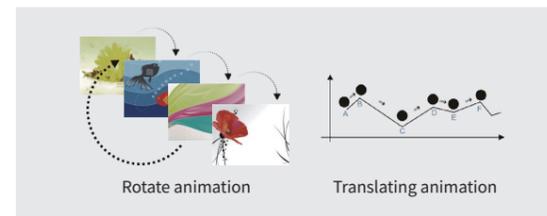

■ Program confidentiality function



■ Translating animation

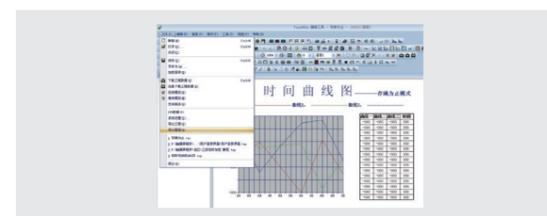


Rich functional components

C language function block, operation, command and communication are omnipotent

• C language function block meets more complex computing and communication needs, give full play to the system functions and better serve customers.

■ Support most standard C functions

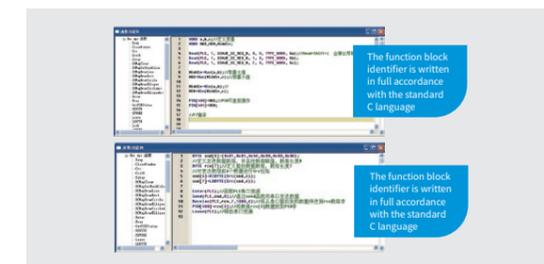

■ The function can be encrypted separately. You need to enter a password to view the function content, which protects the rights and interests of users



Strong data processing capability

■ Process control data acquisition function, and the trend chart display is more intuitive



■ The alarm function allows the system to recover quickly



■ The storage and bidirectional transmission of recipe data greatly improve the work efficiency



■ Export CSV format data through USB flash disk, backup important data

